





20kV, 630A, 50Hz / 16kA (1sec)
 L1
 L2
 L3

230V, 50Hz
 301
 302
 303
 304




L1	101	T1L1: D
L1	102	T1L1: C
L2	103	T1L2: D
L2	104	T1L2: C
L3	105	T1L3: D
L3	106	T1L3: C
L1	301	
L1	302	
L1	303	
L1	304	F301: 22
L1	305	
L1	306	
L1	307	
L1	308	
L1	309	
L1	310	F301: 20
L1	311	
L1	312	
L1	313	
L1	314	
L1	315	
L1	316	

Klemmenleiste: Typ K4, Fabrikat Phönix



Stromwandler T1L1 T1L2 T1L3						
Stromwandleranschluß u. Schutzrelais-einstellung						
Transformator Sn (kVA)	Stromwandler T1L1 / T1L2 / T1L3 0,2VA, 5P30		Brücken am Relais	Prüfstrom an C / D Auslösezeit 11 sek.		
	Typ	Anschl. Übersetzung				
10kV	20kV	WT 1 - W2	S1/S2	7, 2A/0, 3A	13/18	1,5A
125	250				14/18	1,9A
160	315				15/18	2,4A
200	400	WT 1 - W2	S1/S3	14,4A/0, 3A	13/18	3,0A
250	500				14/18	3,8A
315	630				15/18	4,8A
400	800	WT 1 - W3	S1/S2	28,9A/0, 3A	13/18	6,0A
500	1000				13/18	1,5A
500	1000				14/18	1,9A
630	1250	WT 1 - W3	S1/S3	67,7A/0, 3A	15/18	2,4A
800	1600				13/18	3,0A
1000	2000				14/18	3,8A
1250	2500	WT 1 - W3	S1/S3	67,7A/0, 3A	15/18	4,8A
1600	3150				14/18	3,8A
2000	4000				15/18	6,0A

MS - Anlage:
 Calor Emag
 ZL4.1
 Kabelanschluß
 mit Außenkonus

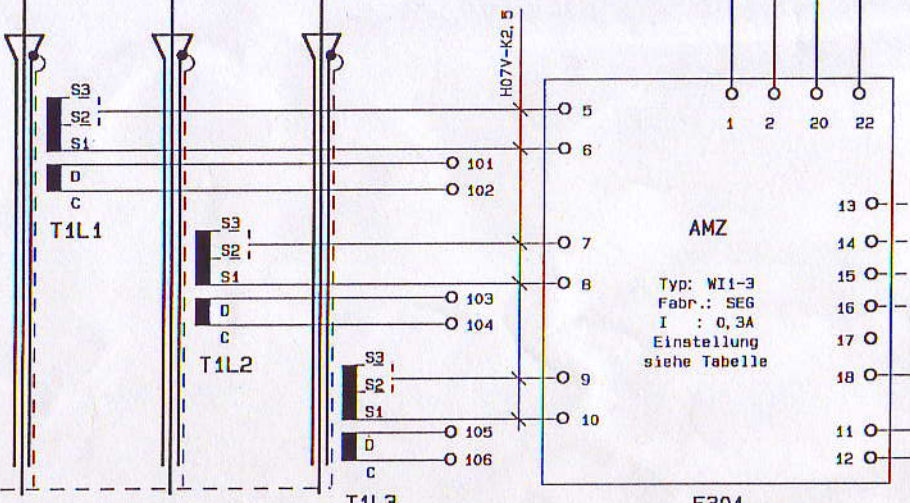

AMZ
 Typ: WT1-3
 Fabr.: SEG
 I : 0,3A
 Einstellung
 siehe Tabelle

F301

H301